


HOUSING B/W CAMERA

MODEL : PRO-260

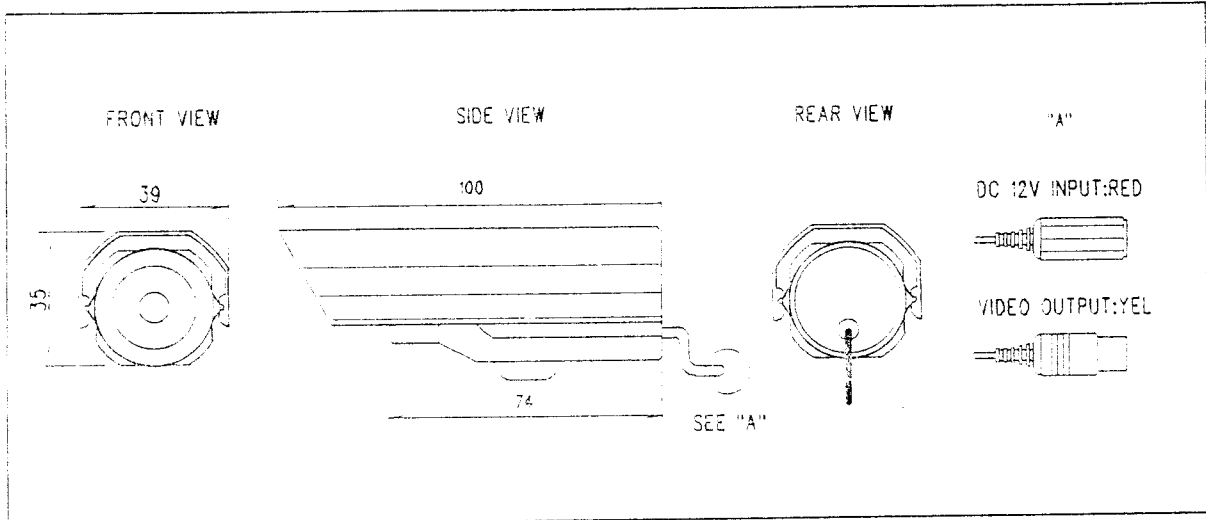

GENERAL FEATURES

- . ULTRA SMALL SIZE ALLOWS FOR SIMPLE APPLICATION AND INSTALLATION
- . NO BLOOMING, NO BURNING
- . 0.1 LUX MINIMUM ILLUMINATION
- . BUILT IN ELECTRONIC AUTO IRIS FOR AUTOMATIC LIGHT COMPENSATION
- . EXTREMELY LOW POWER CONSUMPTION
- . ADJUSTABLE FOCUS
- . ULTRA COMPACT CAMERA
- . ALTERNATE LENS CONFIGURATION
- . CCD AREA IMAGE SENSOR FOR LONG CAMERA LIFE

SPECIFICATIONS

| | |
|-------------------------|---------------------------------|
| MODEL NO | PRO-260 |
| IMAGE PICK-UP DEVICE | 1/3" CCD AREA SENSOR |
| TV SYSTEM | CCIR |
| NO. OF PIXELS | CCIR = 500(H) * 582(V) |
| PIXEL PITCH | CCIR = 9.6uM(H) * 5.3uM |
| SCANNING SYSTEM | CCIR = 625 LINES, 50 FIELD/Sec |
| SYNC SYSTEM | INTERNAL SYNC |
| RESOLUTION | 380 TV LINE |
| USABLE ILLUMINATION | 0.1 LUX F1.2 |
| S/N RATIO | MORE THAN 46dB |
| GAMMA CHARACTERISTIC | 0.45 (GAMMA : 1 OPTION) |
| VIDEO OUTPUT | 1.0 Vp-p 75 ohm |
| ELECTRONIC SHUTTER TIME | CCIR = 1/50 - 1/100,000 Sec |
| POWER SUPPLY | DC 12V |
| POWER CONSUMPTION | 110mA(MAX) |
| LENS | 3.6mm 92 Deg F 2.0 - (STANDARD) |
| OPERATIONAL TEMP. | -10 Deg - +50 Deg C RH95% MAX |
| STORAGE TEMP. | -20 Deg - +60 Deg C RH95% MAX |
| DIMENSIONS | 39mm(W) * 35mm(H) * 100mm(D) |
| WEIGHT | APPX. 350Gr |

The above specification is subject to change without previous notice.

Manufactured and distributed by :